



Slotted hole for key ring (ball chain)

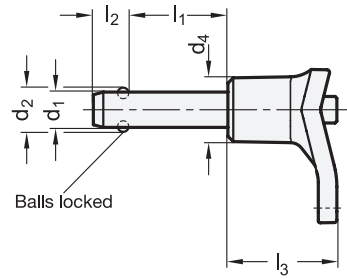


Balls locked

Marking for material AISI 630 (GN 113.12)

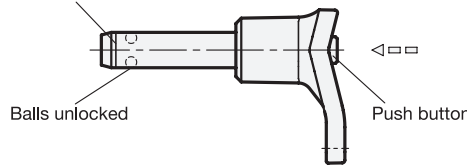

Balls unlocked

Push button



Metric

SS Stainless Steel

Metric table

Dimensions in: millimeters - inches

d ₁ -0.04 -0.08	l ₁ +0.6																d ₂	d ₃	d ₄	l ₂ ±1	l ₃	l ₄	Location bore H11
	5	10	15	20	25	30	35	40	45	50	60	70	80	-	-	-							
5	10	15	20	25	30	35	40	45	50	60	70	80	-	-	-	5.5	17.5	13.5	6	26.5	33	5	
0.20	0.39	0.59	0.79	0.98	1.18	1.38	1.57	1.77	1.97	2.36	2.76	3.15	-	-	-	0.22	0.69	0.53	0.24	1.04	1.30	0.20	
6	10	15	20	25	30	35	40	45	50	60	70	80	-	-	-	7	17.5	13.5	7	26.5	33	6	
0.24	0.39	0.59	0.79	0.98	1.18	1.38	1.57	1.77	1.97	2.36	2.76	3.15	-	-	-	0.28	0.69	0.53	0.28	1.04	1.30	0.24	
8	10	15	20	25	30	35	40	45	50	60	70	80	90	100	-	9.5	23	18	8.2	34	43.5	8	
0.31	0.39	0.59	0.79	0.98	1.18	1.38	1.57	1.77	1.97	2.36	2.76	3.15	3.54	3.94	-	0.37	0.91	0.71	0.32	1.34	1.71	0.31	
10	15	20	25	30	35	40	45	50	60	70	80	90	100	110	120	12	23	18	9.6	34	43.5	10	
0.39	0.59	0.79	0.98	1.18	1.38	1.57	1.77	1.97	2.36	2.76	3.15	3.54	3.94	4.33	4.72	0.47	0.91	0.71	0.38	1.34	1.71	0.39	
12	20	25	30	35	40	45	50	60	70	80	90	100	110	120	-	14.5	30.5	24	10.6	40.5	58	12	
0.47	0.79	0.98	1.18	1.38	1.57	1.77	1.97	2.36	2.76	3.15	3.54	3.94	4.33	4.72	-	0.57	1.20	0.94	0.42	1.59	2.28	0.47	
16	30	35	40	45	50	60	70	80	90	100	110	120	130	140	150	19	30.5	24	14	40.5	58	16	
0.63	1.18	1.38	1.57	1.77	1.97	2.36	2.76	3.15	3.54	3.94	4.33	4.72	5.12	5.51	5.91	0.75	1.20	0.94	0.55	1.59	2.28	0.63	
20	50	60	70	80	90	100	110	120	130	140	150	-	-	-	-	25	40.5	33	20.5	51.5	72.5	20	
0.79	1.97	2.36	2.76	3.15	3.54	3.94	4.33	4.72	5.12	5.51	5.91	-	-	-	-	0.98	1.59	1.30	0.81	2.03	2.85	0.79	
25	50	60	70	80	90	100	110	120	130	140	150	-	-	-	-	30.8	40.5	33	22	51.5	72.5	25	
0.98	1.97	2.36	2.76	3.15	3.54	3.94	4.33	4.72	5.12	5.51	5.91	-	-	-	-	1.21	1.59	1.30	0.87	2.03	2.85	0.98	

Specification

- **GN 113.11**
Shank pin
Stainless steel AISI 303
- **GN 113.12**
Shank pin
Stainless steel AISI 630
Precipitation-hardened
- L-Handle
Plastic
Technopolymer (Polyamide PA)
- Black
- Temperature resistant up to 176 °F (80 °C)
- Balls
Stainless steel AISI 420C
- Spring
Stainless steel
German Material No. 1.4565
- Load Rating Information → page 2104
- RoHS compliant

Accessory

- Ball chains GN 111 / GN 111.5 → page 1236
- Retaining cables GN 111.2 → page 1238
- Spiral retaining cables GN 111.4 → page 1237

Information

GN 113.11 and GN 113.12 L-handle ball lock pins are used for rapid connecting and securing of components or workpieces. A typical application is locating pins that have to regularly be moved in and out of position.

By depressing the spring loaded push button, the two balls are freed, and by releasing the push button the balls are locked.

GN 113.12 ball lock pins have a high load capacity, due to the pin being made of heavy duty, hardened and highly abrasion-resistant stainless steel.

The technical section contains the load ratings for the double shear strength (breaking strength).

see also...

- List of Lock Pin Types → page 1058
- Press-Fit Drill Bushings DIN 172 (with Flange) → page 1172
- Press-Fit Drill Bushings DIN 179 (without Flange) → page 1172

How to order (Stainless steel shank AISI 303)	1	Pin diameter d ₁
GN 113.11-8-25	2	Length l ₁

How to order (Stainless steel shank AISI 630)	1	Pin diameter d ₁
GN 113.12-16-50	2	Length l ₁