



Type A : without stop

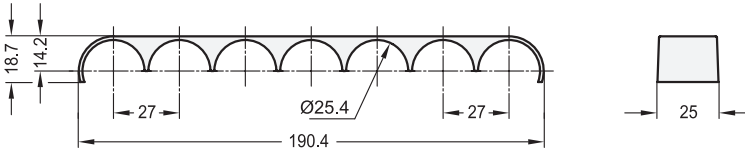

elesa



ELESA original design RLT-B

Type B : with stop

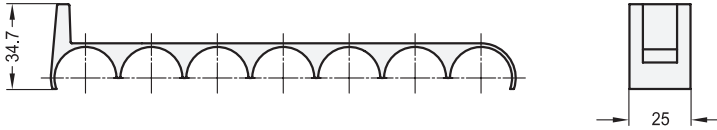

Type

- A Without stop
- B With stop

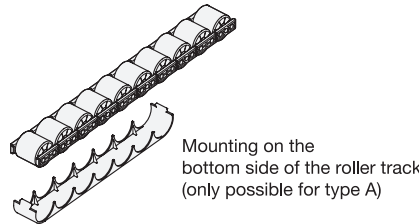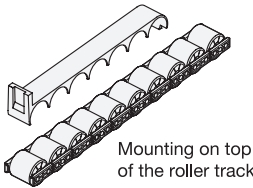

Specification

- Plastic, Polyamide (PA)
- Black
- Operating temperature -4 °F to +194 °F (-20 °C to +90 °C)

RoHS

With brakes EN 646.5, the speed of the material conveyed is reduced, the transport is disrupted or stopped completely. They are mounted by snapping them on.

In type A without stop, the brakes can also be mounted on the bottom side of the conveyor roller track. However, this is only useful with conveyor roller tracks EN 646.1 made of polyurethane (TPU).

see also...	Page
EN 646.1 Conveyor Roller Tracks	QVX

Technical Information

Plastic Characteristics	QVX
-------------------------	-----

How to order

EN 646.5-A

1 Type

3.1
3.2
3.3
3.4
3.5
3.6
3.7
3.8
3.9
3.10